



SP Sickerrohre gemufft inkl. Dichtungen, mit Lochung

- ✓ PP-HM füllstofffrei
- ✓ EN 1852 / R 592012 / Qplus 15009 (Basisrohr)
- ✓ SDR 33 / S 16 / SN 4 (Basisrohr)
- ✓ Weitere Ausführungen auf Anfrage

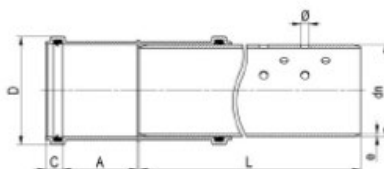

dn	e	D	C	A	L	Winkel	Ø	Loch-	Eintritt	Gewicht	Palette
mm	mm	mm	mm	mm	mm	in °	mm	reihen	cm ² /m	kg/m	m
110	3.4	129.2	20.0	51.0	6000	140	12	4	36	1.100	270
125	3.9	147.3	23.0	56.0	6000	140	12	4	36	1.400	192
160	4.9	186.3	29.0	65.0	6000	140	12	6	54	2.300	108
200	6.2	230.6	36.0	77.0	6000	140	16	6	121	3.560	90

- ✓ PP-HM füllstofffrei
- ✓ EN 1852 / R 592012 / Qplus 15009 (Basisrohr)
- ✓ SDR 29 / S 14 / SN 8 (Basisrohr)
- ✓ Weitere Ausführungen auf Anfrage

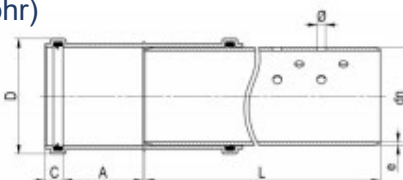

dn	e	D	C	A	L	Winkel	Ø	Loch-	Eintritt	Gewicht	Palette
mm	mm	mm	mm	mm	mm	in °	mm	reihen	cm ² /m	kg/m	m
110	3.8	129.2	20.0	51.0	6000	140	12	6	68	1.230	270
125	4.3	147.3	23.0	56.0	6000	140	12	6	68	1.590	192
160	5.5	186.3	29.0	65.0	6000	140	12	6	68	2.590	108
200	6.9	230.6	36.0	77.0	6000	140	16	6	121	4.030	90
250	8.6	290.8	48.0	90.0	6000	140	16	6	121	6.270	48
315	10.8	361.1	57.0	108.0	6000	140	16	6	121	9.880	36
400	13.7	455.3	65.0	121.0	6000	140	16	6	121	15.890	24